

Inspector+

a B y X 

Now with an adjustable alert, the Inspector+ is a small, handheld, microprocessor-based instrument which offers excellent sensitivity to low levels of alpha, beta, gamma, and x-rays. The digital readout is displayed with a red count light and a beeper sounds with each count detected. Other features include an adjustable timer, external calibration controls and selectable alert.

Detector

Internal Halogen-quenched, uncompensated GM tube with thin mica window, 1.4-2.0 mg/cm² areal density. Effective diameter of window is 45 mm (1.75 in.).

Operating Range

mR/hr - .001 (1μR) to 100 mR/hr CPM - 0 to 350,000
 μSv/hr - .01 to 1000 CPS - 0 to 5000
 Total/Timer - 1 to 9,999,000 counts

Accuracy

mR/hr ±10% typical (NIST), ±15% max - 0 to 100
 μSv/hr ±10% typical (NIST), ±15% max - 01 - 1000
 CPM ±10% typical (NIST), ±15% max - 0 to 350,000
 (Referenced to Cs-137)

Alert Set Range

mR/hr .001 - 50 and CPM 1 - 160,000

Power Requirements

One 9-volt alkaline battery. 2160 hours at background.

Weight

Inspector: 275 grams (9.7 oz.) without battery.

Size

150 x 80 x 30 mm (5.9 x 3.3 x 1.2 in.).

Count Light

Red LED flashes with each radiation event.

Outputs

Dual miniature jack drives CMOS or TTL devices: count to computer or datalogger. Submini jack input allows for electronic calibration

Anti-Saturation

Meter holds full scale in fields as high as 100 times the maximum reading.

Temperature Range


-10°C to 50°C (14°F to 122°F)

Includes

Carrying Case, CE Certification

Warranty

1 year limited, 90 day Warranty on GM Detector.

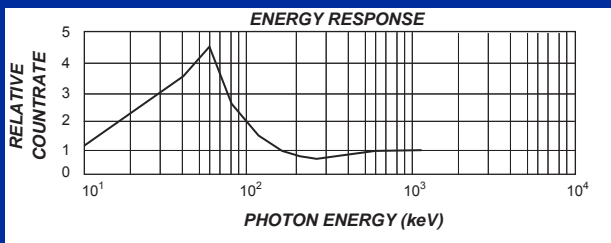

ACTUAL SIZE <http://www6.uwants.com/forum/display.php?fid=28>



RADIATION[®]
A · L · E · R · T
 QUALITY HANDHELD DETECTORS



PACIFIC-TEC SCIENTIFIC PTE LTD

33 Ubi Avenue 3, #06-48 Vertex, SINGAPORE 408868
 Tel: (65) 6342 1530 Fax: (65) 6342 1531

Email: sales@pacific-tec.sg Website: www.pacific-tec.sg