

USB Inspector

HANDHELD RADIATION ALERT ® DETECTOR

Display

Backlit 4 digit liquid crystal display with indicators.
Display updates every 3 seconds.

Alert Set Range

mR/hr .001 - 50 and CPM 1 - 160,000. 70db @ 1m.

Count Light

Red LED flashes with each radiation event.

Audio Indicator

Internally mounted beeper
(can be switched off for silent operation)

Outputs

Dual miniature jack drives CMOS or TTL devices and counts to computer or datalogger.

USB for use with Observer USB Software for PCs

Anti-Saturation

Meter will hold at full scale in fields as high as 100 times the maximum reading.

Built-In Efficiencies

⁵Sulfur (S35), ⁹⁰Strontium (Sr/y90), ¹³⁷Cesium (Cs137),
³²Phosphorus (P32), ¹⁴Carbon (C14), ¹³¹Iodine (I131),
⁶⁰Cobalt (Co60), and Alpha

Power Requirements

One 9-volt alkaline battery. Battery life is approx. 1200 hours at normal background.

Temperature Range

-10°C to 50°C (14°F to 122°F)

Weight

Inspector: 273 g (9.6 oz.) without battery.

Size

150 x 80 x 30 mm (5.9 x 3.1 x 1.2 in.).

Includes


Carrying Case, Certification of Conformance,
Observer USB Software

Options

Xtreme Boot, Wipe Test Plate, & Stand

Limited Warranty

1 year limited warranty

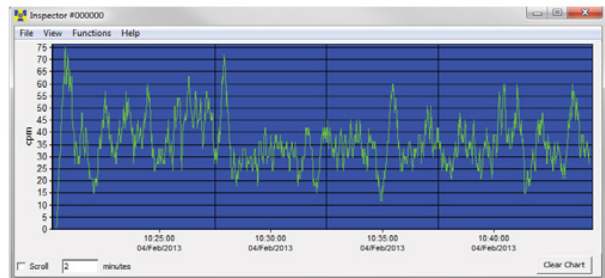

USB Observer Software collects data stored in the internal memory of The InspectorUSB



Wipe Test Plate Available



Inspector Xtreme Pictured Right



The Xtreme Boot option provides easy access to the buttons.

SE. INTERNATIONAL INC



PACIFIC-TEC SCIENTIFIC PTE LTD

33 Ubi Avenue 3, #06-48 Vertex, SINGAPORE 408868
Tel: (65) 6342 1530 Fax: (65) 6342 1531
Email: sales@pacific-tec.sg Website: www.pacific-tec.sg
Company and GST Registration No.: 200704040Z

RADIATION[®]

A • L • E • R • T

